


C9.3

Marine Auxiliary Engine Commercial Applications

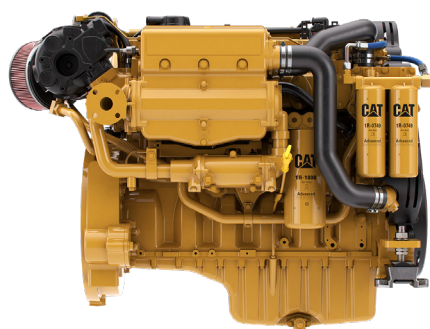

ENGINE SPECIFICATIONS

CONFIGURATION	Inline 6, 4-Stroke Cycle diesel
EMISSIONS	IMO II, IMO III U.S. EPA Tier 3 China Stage II
RATED ENGINE SPEED	1,500, 1,800 rpm
DISPLACEMENT	9.3 L (567.5 cu in)
ASPIRATION	Turbocharged-aftercooled
GOVERNOR	Electronic

BORE x STROKE	115 mm x 149 mm (4.5 in x 5.8 in)
REFILL CAPACITY	Lube Oil System w/oil filter change: 24.5 L (6.5 gal)
OIL CHANGE INTERVAL	500 hrs
FLYWHEEL HOUSING	SAE No. 1 (113 teeth)
ROTATION	Counterclockwise
COOLING	Heat exchanger and separate or combined keel cooled options

KEY FEATURES & BENEFITS

- Electronic control system provides industry-leading torque and throttle response at low speeds, while maintaining fuel efficiency at high speeds
- Common rail fuel system enables optimum combustion and low emissions
- RH and LH locations service options for fuel and oil filters, as well as dipstick location for easily accessible service
- Compatible with Cat® displays
- Available remote-mounted display panel with start, stop, and engine diagnostics
- 12V or 24V electrical system
- Certified by all marine classification societies
- Utilizes SCR technology enabling IMO III emissions compliance while lowering operational costs

STANDARD EQUIPMENT

- Water-cooled turbocharger and exhaust manifold
- Electronic control system
- Thermostats and housing
- Gear-driven sea water pump (self-priming)
- Common rail fuel system
- Shell and tube jacket water heat exchanger
- Corrosion-resistant Sea water aftercooler
- Engine oil cooler
- Vibration damper and guard
- Primary fuel filters

OPTIONAL ATTACHMENTS

- Alternators – 24V 70 or 105 amp, 12V 110 amp
- Closed crankcase ventilation
- Transmission gear oil cooler (engine mounted for HEX)
- Additional engine and transmission sensor packages
- Instrument panels
- Electric starting motors – 12V or 24V
- Air starting motor
- Dual electric starting motors or combined electric/air
- Electric fuel priming pump
- Fuel cooler
- PTO Drives – V-belt pulley stack, stub shaft
- Duplex fuel and oil filters
- Double wall fuel rail


RATINGS & FUEL CONSUMPTION

bhp	bkW	rpm	U.S. g/h	g/bkW-hr	IMO	U.S. EPA	EU	China
292	218	1500	13.5	198.7	II	NC	NC	C-II
282	210	1500	13.4	204.7	II/III	NC	NC	NC
362	270	1500	16.6	198.3	II	NC	NC	C-II
351	262	1500	16.9	206.9	II/III	NC	NC	NC
369	275	1800	18.0	211	II	T3C	NC	C-II
363	271	1800	17.9	212.7	II/III	NC	NC	NC
436	325	1800	21.1	208.7	II	T3C	NC	C-II

ENGINE DIMENSIONS & WEIGHT

AUXILIARY ENGINE


LENGTH (1)	57.2 in / 1,452 mm
WIDTH (2)	38.5 in / 978 mm
HEIGHT (3)	43.0 in / 1,093 mm
DRY WEIGHT	2083 - 2474 lb / 945 - 1122 kg

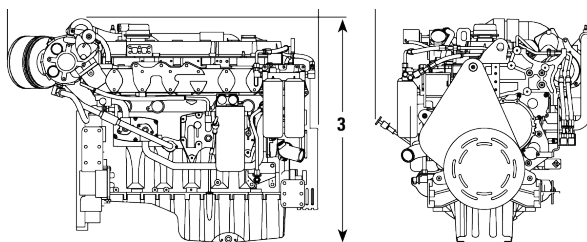

AFTERTREATMENT


CLEAN EMISSION MODULE (CEM)

LENGTH (1)	40.79 in / 1,036.1 mm
WIDTH (2)	41.4 in / 1,050.7 mm
HEIGHT (3)	18.69 in / 474.7 mm
WEIGHT	300 lb / 136 kg

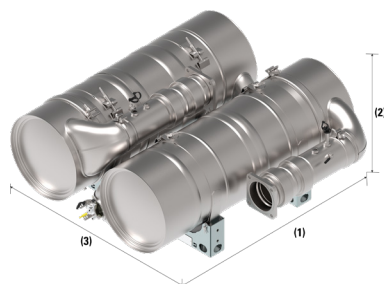

DOSING CABINET

LENGTH (1)	24.4 in / 620 mm
WIDTH (2)	22.4 in / 570 mm
HEIGHT (3)	22 in / 560 mm
WEIGHT	165 lb / 75 kg



For detailed dimensions and installation requirements, please refer to the latest revisions of the A&I guide (Media # LEBM0023)



Contact your Local Cat® Dealer
for more information!

LEHM21494-00

©2023 Caterpillar. All Rights Reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

